


NOMINAL SIZE	ACTUAL SIZE		
	W	H	D
12 x 24 x 2	11.375	23.375	1.75
16 x 20 x 2	15.5	19.5	1.75
16 x 25 x 2	15.5	24.5	1.75
20 x 20 x 2	19.5	19.5	1.75
20 x 25 x 2	19.5	24.5	1.75
24 x 24 x 2	23.375	23.375	1.75
12 x 24 x 4	11.375	23.375	3.75
16 x 20 x 4	15.5	19.5	3.75
16 x 25 x 4	15.5	24.5	3.75
20 x 20 x 4	19.5	19.5	3.75
20 x 25 x 4	19.5	24.5	3.75
24 x 24 x 4	23.375	23.375	3.75

NOTES:

- FILTER CONSTRUCTION
 - 1.1. PLEATED FIBERGLASS MEDIA
 - 1.2. GALVANIZED EXPANDED METAL
 - 1.3. HEAVY-DUTY ALUMINIZED STEEL FRAME
- FILTERS CLASSIFIED BY U.L.
- TOLERANCES
 - 3.1. $\pm \frac{1}{8}$ " H&W, $\pm \frac{1}{16}$ " D

PERFORMANCE NOTES:

- EFFICIENCY
 - 1.1. MERV 8
- MAX. TEMPERATURE OF 300 F
- INITIAL RESISTANCE
 - 3.1. MERV 8 =0.50" AT 500 FPM

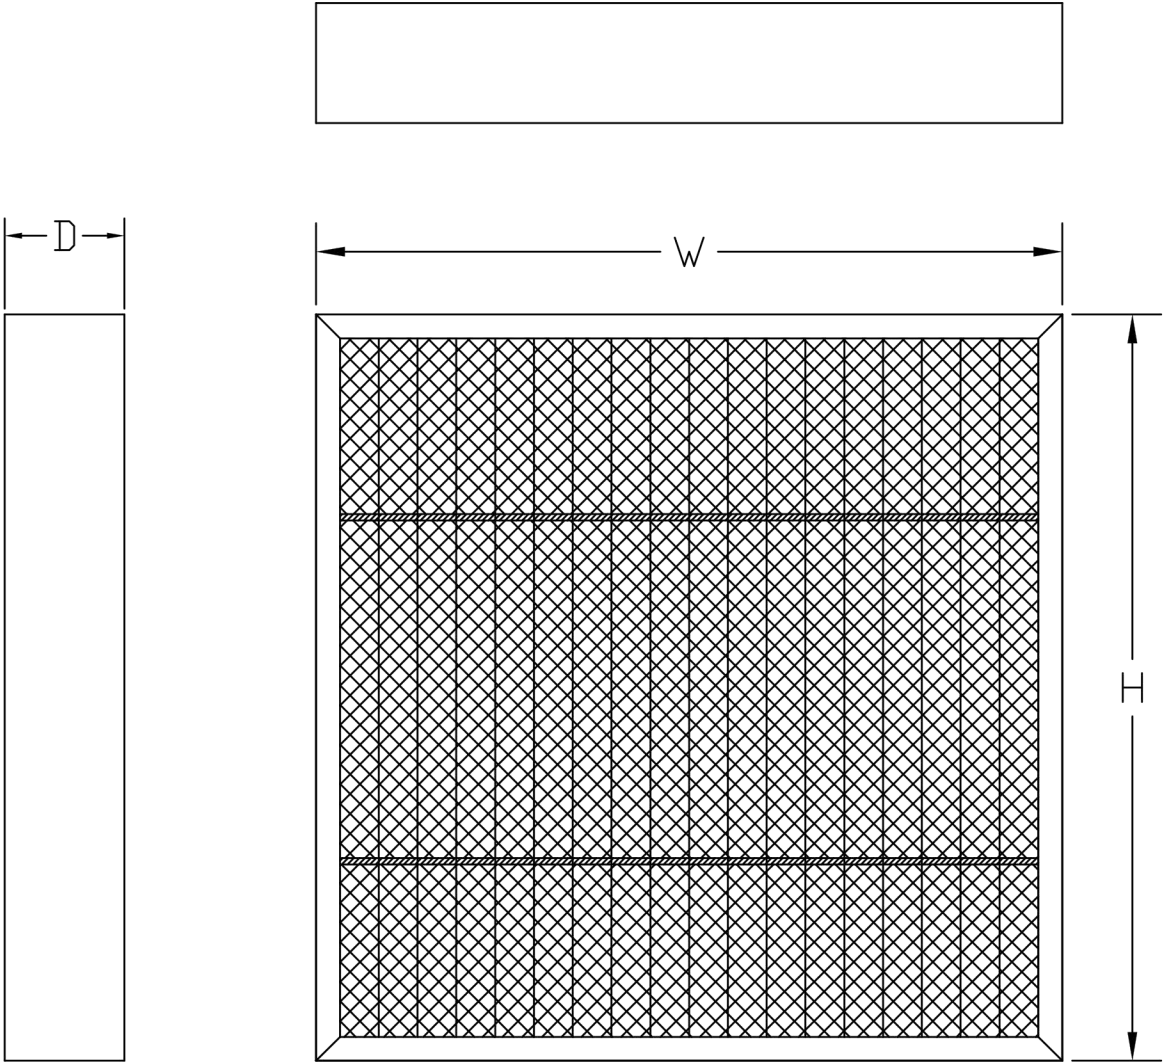

B	LAYOUT UPDATE		
A	FIRST ISSUE NEW LAYOUT		
REVISION	DESCRIPTION	DATE	DRAWN

High Temperature Pleated Air Filter			
TITLE:			
DRAWING NUMBER:			